


PRODUCT IMAGE / IMAGE DU PRODUIT

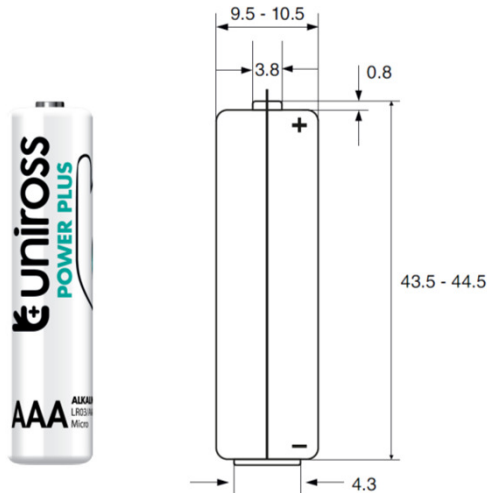

GENERAL SPECIFICATIONS / SPECIFICATION GÉNÉRALES

| | |
|---|----------------------|
| Designation IEC / Désignation IEC | LR03-AAA |
| Technology / Technologie | Alkaline / Alcaline |
| Chemical system / Système chimique | Zn- MnO ₂ |
| Nominal voltage / Tension nominale | 1.5V |
| Capacity (mAh) | 1000 |
| <i>*75Ω, 4h/day at 20+/-2°C, EPV 0.9V</i> | |
| Average weight (g) / Poids moyen (g) | 10.8 |
| Shelf Life / Durée de vie | 5 years / 5 ans |
| Mercury & Cadmium Free | 100% |

TEMPERATURE RANGE / PLAGE DE TEMPÉRATURE

| | |
|---|----------------|
| Operating temperature range / Température d'utilisation | -18°C to +45°C |
| Storage Temperature Range / Température de stockage | 5°C to +30°C |

RECOMMENDED APPLICATIONS / APPLICATIONS RECOMMANDÉES

| | |
|--|---|
| Portable Stereo Radio Portable Lighting Clock Remote control | Stéréo portable Radio Éclairage portatif horloge Télécommande |
|--|---|

PERFORMANCE CHARACTERISTICS / CARACTÉRISTIQUES DE PERFORMANCE

| Applications / Applications | Portable Stereo | Toy | Portable lighting | Portable lighting 1 | |
|-----------------------------------|-----------------|---------------|-------------------|---------------------|--|
| Load / Charge | 5.1Ω | 50mA | 5.1Ω | 24Ω | |
| Discharge Mode / Mode de décharge | 1h/d | 1h/12h, 24h/d | 4m/h, 8h/d | 15s/m, 8h/d | |
| End Voltage / Tension de fin | 0.8V | 0.9V | 0.9V | 1.0V | |
| Normal Duration / Durée normale | 210 | 17 | 200 | 16 | |
| Unit / Unité | Min | Hr | Min | Hr | |

*The above information is generally descriptive only and is not intended as guarantee or warranty
 **Uniross reserves the right to alter or amend the design, model and specification without prior notice.